



Commercial AHD 7 inch or 9 inch Monitor 2 Camera Input

Visit iBEAMUSA.com for more detailed information about the product and up-to-date vehicle specific applications.

Product Features

- 7 inch monitor (TE-AHD7M)
- 9 inch monitor (TE-AHD9M)
- 2 camera inputs, audio on both inputs
- Resolution: 1240 X 600
- PAL/NTSC auto switching
- 720p/960p/1080p auto switching

Part Components

A) Monitor B) Harness and hardware C) Sunshade and mount

A



B



C



TABLE OF CONTENTS

Button operation and accessing the menu	2-3
Menu.....	4-5
Wiring.....	6
Specifications.....	7

TOOLS REQUIRED

- Wire stripper
- Tape
- Digital Multi-meter

Attention! When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.


BUTTON OPERATION - ACCESSING THE SETTINGS

Normal button press operation

1. **Power** - Turns the monitor on and off
2. **Mode** - Switch between input 1 and input 2
3. **Left arrow** - One press of the button brings up the volume menu and will decrease the volume.
4. **Menu** - Pulls up the Settings menu
5. **Right arrow** - One press of the button brings up the volume menu and will increase the volume.
6. **Brightness mode** - switches through different preset brightness settings
7. **Mirror image** - Mirrors the image of the camera that is active
8. **Remote IR**

Accessing the Settings menu

1. Press the **MENU** button to access the settings menus
2. Use the **MENU** button to cycle through the Menu icons on the left of the screen
3. To select the desired menu, press the **RIGHT ARROW** button.
4. Once in the menu, use the **MODE** button to cycle through the options
5. Use the **LEFT ARROW** and **RIGHT ARROW** to change the settings.

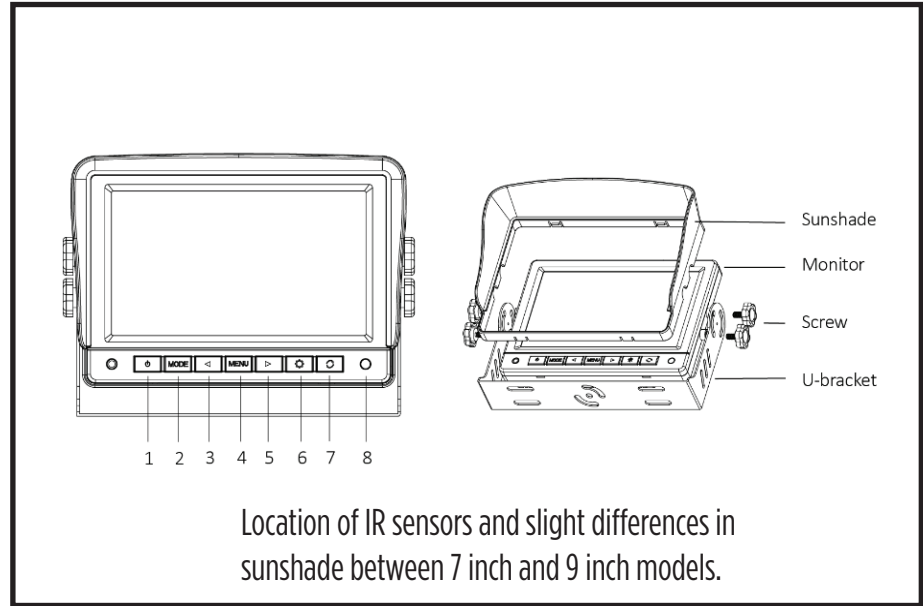

REMOTE

Remote - the buttons on the remote will work the same way the monitor buttons are listed on Page 2

1. Power
2. Mode
3. Up/positive increase
4. Menu
5. Down/negative decrease
6. Mode Selection

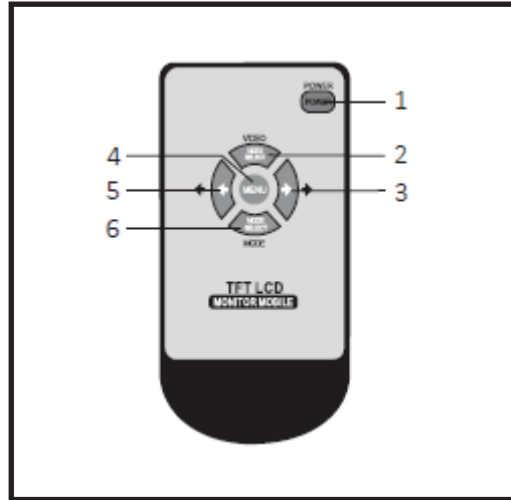


Figure A

MENU

Settings Menus

Image settings - This menu will allow you to change the settings on the USER preset

- Brightness - 0-100
 - Contrast - 0-100
 - Saturation - 0-100
 - Reset resets all the settings to 50
1. **Voice settings** - adjusts the volume of the audio inputs
 - Volume - 0-100



Figure A

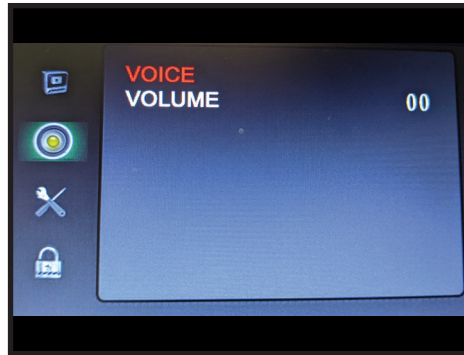


Figure B

MENU CONT.

Settings Menu (cont.)

1. **System** - this menu allows you to change specific settings for the operating system
 - **Language** - changes the language - see specs for different languages (page 7)
 - **Acc-Time** - 0-15 sec - Changes the time of the delay for the trigger after it is no longer active
 - **Sleep** - changes the time the monitor will stay active before it goes into sleep mode - 00-100 minutes by 10s
 - **Flips** - Rotates the camera image
 - RD - Right down
 - LD - Left down
 - LU - Left up
 - RU - Right up
2. **Function**
 - **Guidelines** - turns the guidelines on and off - only visible while the trigger is active

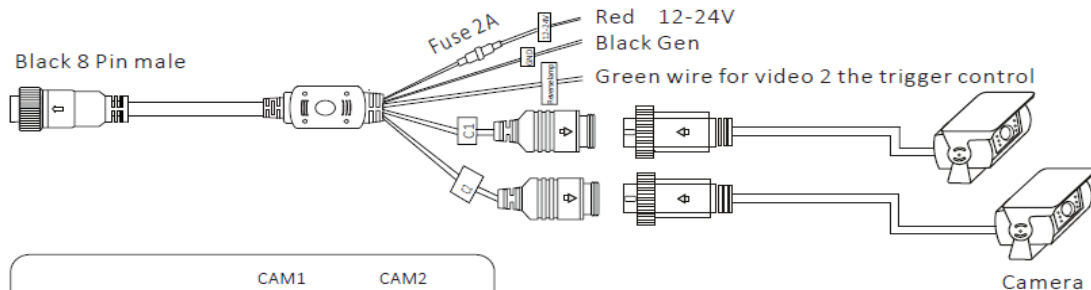


Figure A



Figure B

WIRING



	CAM1	CAM2
1	Power 12V out	Power 12V out
2	Ground	Ground
3	Video in	Video in
4	X	Audio in

SPECIFICATIONS

Resolution	1240X600 RGB
Video input format	720p/960p/1080p HD 25/30fps
TV System	NTSC/PAL auto switching
Aspect ratio	16:9
Working Voltage	12V-24V
Storage Temp.	-30°~80 °C
Working Temp.	-20°~70 °C
Languages	Chinese, English, Dutch, Duetch, French, Italian, Portugese, Spanish, Russian



Having difficulties? We're here to help.



Contact our Tech Support line at:
386-257-1187



Or via email at:
techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



TE-AHD7M



TE-AHD9M



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra Recommends MECP
certified technicians**