


Jeep JK Wrangler – Trigger harness

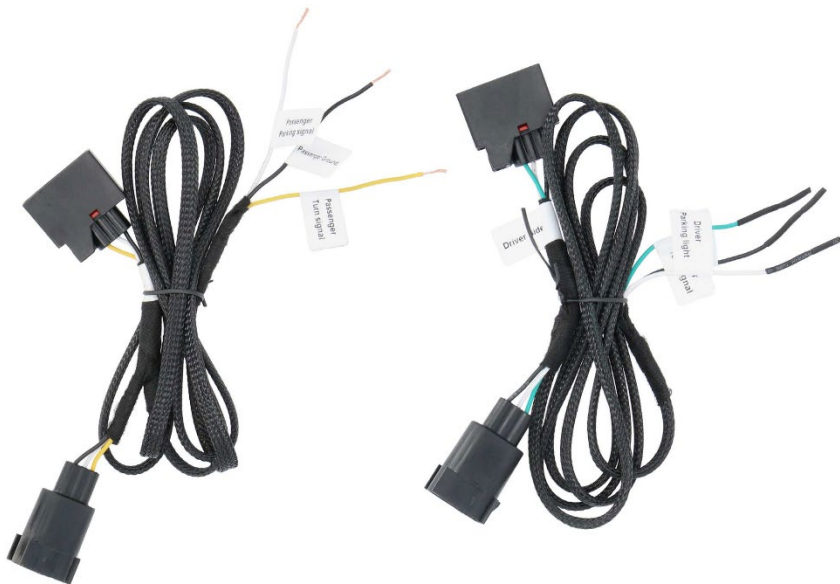

JEEP JK WRANGLER 2007-2018

Visit [HEISELED.COM](https://www.heiseled.com) to view the available installation parts and Jeep accessories.

FEATURES

- OE Connections
- Provides parking light and turn signal triggers
- Labeled connections
- Drivers and passenger harnesses

Tools needed

- Panel removal tool
- Small flat blade (Optional)

Having difficulties?

Contact our tech support line at:
Techsupport@metra-autosound.com


Or via phone at:
368.257.1187

TECH SUPPORT HOURS (EST)

Monday-Friday: 9:00AM – 7:00PM
Saturday: 10:00AM – 5:00PM
Sunday: 10:00AM – 4:00PM

Closed for most US Federal Holidays

1. Using your pry tool, pull up the push pins that hold the grille to the radiator support.
2. Pull the bottom of the grille away from the Jeep.
3. Locate the turn signal, disconnect the harness by pulling back the red clip, and pushing down on the harness clip. Insert the JP-TSH2 inline, between the oe harness and the signal.

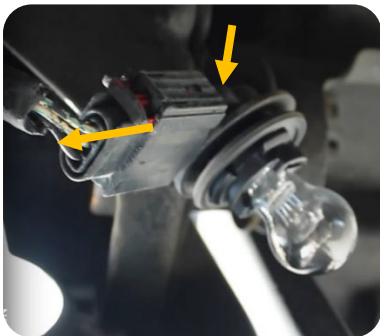



Trigger output: Drivers side
White – Parking light
Black – TIPM Ground
Green: Turn signal



Trigger output: Passengers side
White – Parking light
Black – TIPM Ground
Yellow: Turn signal

4. Route trigger wires into engine bay, ensuring to clear pinch points, moving pulleys, and hot areas.
5. Connect desired item to triggers, and reinstall the front grille.



Thank you for purchasing your lighting from Metra Electronics! We're excited to see your installs, scan the QR to share on our Instagram. If you have any questions, comments, feedback on the product, please contact our tech support email via techsupport@metra-autosound.com.

Don't forget to Visit [HEISELED.COM](https://www.heiseled.com) to view the available installation parts and Jeep accessories.

