

INSTALLATION INSTRUCTIONS FOR PART 99-7332





99-7332

TABLE OF CONTENTS

<u>Dash Disassemb</u>	ly				
- Hyundai Elantra	n (Radio Delete	Models)	2007-20	10	 1
<u>Kit Assembly</u>					
- DIN Radio Provi	ision with Pock				 2
- ISO Radio Provi	sion with Pock				 3
<u>Final Assembly</u>					 4

*Note:


Refer also to the instructions included with the aftermarket radio.




<u>HYUNDAI ELANTRA</u> (RADIO DELETE MODELS) <u>2007-2010</u>

- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Unclip the panel surrounding the radio including the a/c vents and hazard switch. Unplug the hazard switch and remove the panel. (Figure A)
- 3 Remove (4) Phillips screws securing the blank plate/pocket covering the radio cavity and remove the plate. (Figure B)

Continue to kit assembly.



B






DIN RADIO PROVISION WITH POCKET


*Note: Refer also to the instructions included with the aftermarket radio.

- 1 Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs outward. (Figure A)
- 2 Slide the aftermarket radio into the cage until it snaps into place. (Figure B)

Continue to final assembly.



B






ISO RADIO PROVISION WITH POCKET

*Note: Refer also to the instructions included with the aftermarket radio.


- 1 Mount the ISO Brackets to the aftermarket radio using the screws supplied with the radio. (Figure A)
- 2 Slide the radio into the radio opening until the side clips snap into place. (Figure B)
- 3 Snap the trim plate onto the front of the Radio Housing. (Figure B)

Continue to final assembly.

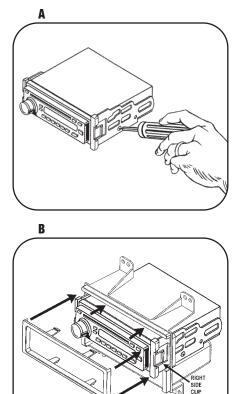



FINAL ASSEMBLY



- (A) Strip wire ends back 1/2"
- B) Twist ends together
- C) Solder
- D) Tape
- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit.)
- 2 Re-connect the negative battery terminal and test the unit for proper operation.
- 3 Reassemble radio and dash assemblies in reverse order of disassembly.

FINAL WIRING CONNECTIONS

Make wiring connections using the EIA color code chart shown below and the instructions included with the head unit. Metra recommends making connections as shown below; Strip, Splice, Solder, Tape. Isolate and individually tape off ends of any unused wires to prevent electrical short circuit.

Metra / EIA WIRING CODE


12V Ignition / Acc	Red	Right Front (+)	Gray
12V Batt / Memory	Yellow	Right Front (-)	Gray/ Black
Ground	Black*	Left Front (+)	White
Power Antenna	Blue	Left Front (-)	White / Black
Amp Turn-On	Blue / White	Right Rear (+)	Violet
Amp Ground	Black / White	Right Rear (-)	Violet / Black
Illumination	Orange	Left Rear (+)	Green
Dimmer	Orange / White	Left Rear (-)	Green / Black

***NOTE:** When a Black wire is not present, ground radio to vehicle chassis.

All colors may not be present on all leads due to manufacturer's specifications.



NOTES

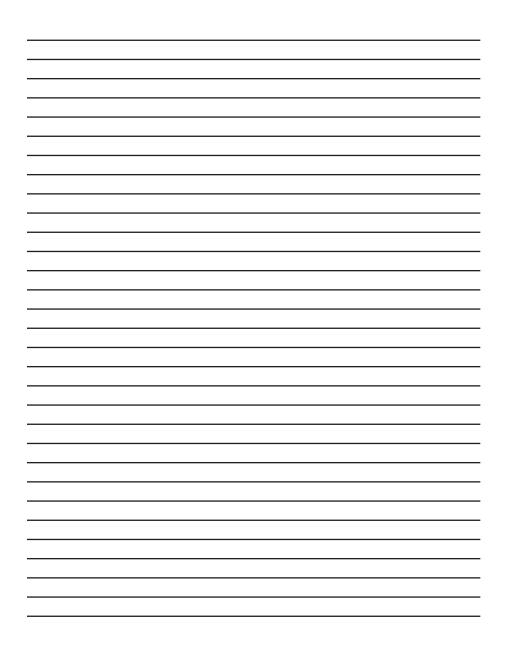

99-7332 INSTRUCTIONS

1-800-221-0932 **www.metraonline.com**

REV. 04/30/10 © COPYRIGHT 2010 METRA ELECTRONICS CORPORATION INST99-7332