



Chrysler Stop/Start Override Interface 2015-Up

INTERFACE FEATURES

- Allows the override of the STOP/START engine feature
- The factory STOP/START button can resume the STOP/START feature
- Can be used with either a factory or aftermarket radio
- Vehicle type configured through the Axxess Updater software program
- Simple plug n' play installation, no wiring required

INTRODUCTION

The AXSSO-CH is designed to disengage the STOP/START feature of the vehicle, and keep that feature disengaged even after the key has been cycled. The AXSSO-CH will work with either an aftermarket radio, or a factory radio. A simple plug n' play installation is all that is required to install the device in the vehicle, and programming through a Windows 10 computer via the [Axxess Updater](#) software program.

APPLICATIONS

Chrysler	Dodge	Jeep
Pacifica	Durango	Cherokee
	2018-Up	2016-2018
		Gladiator
		2020-Up
		Grand Cherokee
		2015-2017
		Wrangler
		2019-Up

TABLE OF CONTENTS

Programming.....	2
Connections.....	3
Operation.....	4

INTERFACE COMPONENTS

- AXSSO-CH interface
- AXSSO-CH harness (qty. 2)

TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Zip ties • Cutters (for zip ties)
- Micro-B USB cable
(Axxess part number **AXUSB-MCBL**)


Product Info




PROGRAMMING





(Figure A)

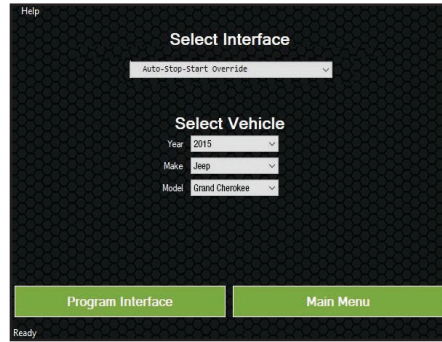



(Figure B)

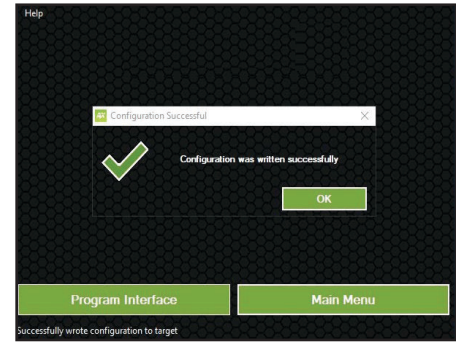

(Figure C)

-  Download and install the **Axxess Updater** software program from: axcessinterfaces.com/resources/updater-software
-  Connect the micro-B USB cable (sold separately) to the computer and AXSSO-CH interface. Open the **Axxess Updater** software program and wait until the word **Ready** is shown in the bottom left of the screen. Select **Stop / Start**. (Figure A)

-  On the next screen that opens, select the year, make, and model of the vehicle, then press **Program Interface**. (Figure B)
-  When the **Configuration Successful** box pops up, the programming process is complete. (Figure C)

Continue to Installation

INSTALLATION

These vehicles will connect to the wiring harness located at the radio location.

Chrysler

Pacifica 2017

- Disassembly instructions: metraonline.com/part/99-6543HG

Dodge

Durango 2016-Up

- Disassembly instructions: metraonline.com/part/99-6537B

Jeep

Cherokee 2016-Up

- Disassembly instructions: metraonline.com/part/99-6518B

Grand Cherokee 2015-Up

- Disassembly instructions: metraonline.com/part/99-6536S

From the wiring harness in the vehicle behind the radio:

1. Unplug the main connector from the radio.
2. Plug the AXSSO-CH harness in between the **radio** and **radio harness**.
3. Plug the AXSSO-CH harness into the AXSSO-CH interface.



These vehicles will connect to the hazard switch in the dashboard.

Chrysler

Pacifica 2018-Up

- Disassembly instructions: metraonline.com/part/99-6543HG

Jeep

Wrangler 2019-Up


- Disassembly instructions: N/A

Gladiator 2020-Up

- Disassembly instructions: N/A

From the hazard switch:

1. Unplug the connector from the hazard switch.
2. Plug the AXSSO-CH harness in between the **hazard switch** and **hazard switch harness**.
3. Plug the AXSSO-CH harness into the AXSSO-CH interface.

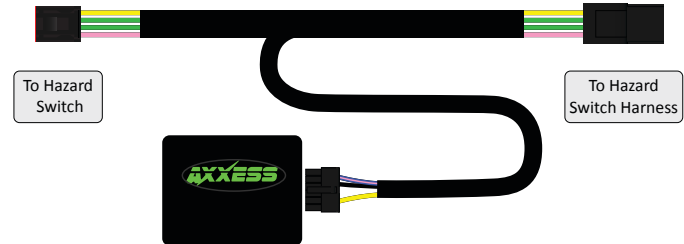

OPERATION

Re-engaging the STOP/START feature

1.  Press the factory STOP/START button to re-engage the STOP/START feature.

Having difficulties? We're here to help.



Contact our Tech Support line at:
386-257-1187 Or via email at:
techsupport@metra-autosound.com



Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.edu or call 386-672-5771 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**