



KNOWLEDGE IS POWER
 Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians

Version 1.0



iBEAM[®]
 VEHICLE SAFETY SYSTEMS

800.221.0932
iBeamUSA.com

460 Walker Street, Holly Hill, FL 32117



iBEAM[®]
 VEHICLE SAFETY SYSTEMS

TE-HPC-M2 Product Manual



KNOWLEDGE IS POWER
 Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians

Version 1.0



iBEAM[®]
 VEHICLE SAFETY SYSTEMS

800.221.0932
iBeamUSA.com

460 Walker Street, Holly Hill, FL 32117



iBEAM[®]
 VEHICLE SAFETY SYSTEMS

TE-HPC-M2 Product Manual




I. Specifications

• Image Sensor	11/32" Sony CMOS
• Lens Angle:	130°
• IR LEDs:	6pcs
• Special Function:	Microphone Built-in
• Min. Illumination:	0 Lux
• Effective Pixels:	1920(H) x 1080 (V)
• Shutter Speed:	1/30 ~ 1/50,000 seconds
• S/N Ratio:	> 52 dB
• Video Output:	1.1Vp.-p, 75 Ohm
• Power Supply:	DC 12V
• Waterproof Rating:	IP69K
• Operating Temperature:	-20 C°~ 70 C°

I. Specifications


• Image Sensor	11/32" Sony CMOS
• Lens Angle:	130°
• IR LEDs:	6pcs
• Special Function:	Microphone Built-in
• Min. Illumination:	0 Lux
• Effective Pixels:	1920(H) x 1080 (V)
• Shutter Speed:	1/30 ~ 1/50,000 seconds
• S/N Ratio:	> 52 dB
• Video Output:	1.1Vp.-p, 75 Ohm
• Power Supply:	DC 12V
• Waterproof Rating:	IP69K
• Operating Temperature:	-20 C°~ 70 C°

II. Connection

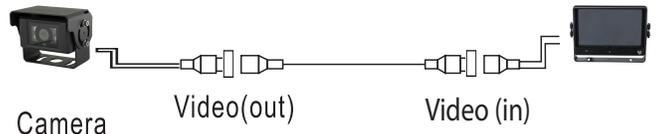

1. Find a suitable location to surface mount install the camera. Make sure the camera's view is unobstructed and be careful not to drill into any wires that might damage the vehicle. When all connections have been made and before mounting the camera, verify the camera is working and has good view of the area. Then mount the camera down with screws.
2. Power and ground is provide from the monitor via the 4 Pin Din cable to the camera. 4 Pin Din cable will also carry video from camera to the monitor.
3. Run 4 Pin Din cable though vehicle, up to monitor. (Avoid placing video cable where it can get pinched or damaged).
4. Attach the 4 Pin Din cable to camera's output and to the input of the monitor.

II. Connection

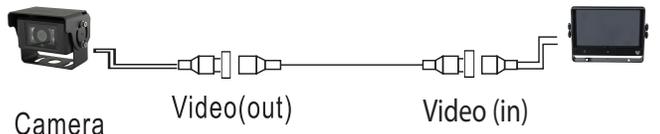

1. Find a suitable location to surface mount install the camera. Make sure the camera's view is unobstructed and be careful not to drill into any wires that might damage the vehicle. When all connections have been made and before mounting the camera, verify the camera is working and has good view of the area. Then mount the camera down with screws.
2. Power and ground is provide from the monitor via the 4 Pin Din cable to the camera. 4 Pin Din cable will also carry video from camera to the monitor.
3. Run 4 Pin Din cable though vehicle, up to monitor. (Avoid placing video cable where it can get pinched or damaged).
4. Attach the 4 Pin Din cable to camera's output and to the input of the monitor.